

HUR4103XR

XPON ONU 4GE+2.4G&5.8G+CATV+USB SPECIFICATION

1. Overview

- HUR4103XR is designed as HGU (Home Gateway Unit) in different FTTH solutions. The carrier-class FTTH application provides data and video service access .
- HUR4103XR is based on mature and stable, cost-effective XPON technology. It could switch automatically into EPON mode or GPON mode when access to the EPON OLT and GPON OLT.
- HUR4103XR adopts high reliability, easy management, configuration flexibility and good quality of service guarantees to meet the technical performance of EPON Standard of China Telecom CTC3.0 and GPON Standard of ITU-TG.984.X

2. Functional Feature

- Support EPON/GPON mode and switch mode automatically
- Support Route mode for PPPoE/DHCP/Static IP and Bridge mode
- Support IPv4 and IPv6 Dual mode
- Support 2.4G&5.8G WIFI and Multiple SSID
- Support CATV interface for Video Service and remote control by Major OLT
- Support LAN IP and DHCP Server configuration
- Support Port Mapping and Loop-Detect
- Support Firewall function and ACL function
- Support IGMP Snooping/Proxy multicast feature
- Support TR069 remote configuration and maintenance
- Specialized design for system breakdown prevention to maintain stable system

HUR4103XR

3. Hardware Specification

Technical item	Details
PON Interface	1 GPON BoB (Bosa on Board)
	Receiving sensitivity: $\leq -27\text{dBm}$
	Transmitting optical power: $0\sim +5\text{dBm}$
	Transmission distance: 20KM
Wavelength	TX: 1310nm, RX: 1490nm
Optical Interface	SC/APC Connector
Chip Spec	RTL9607C DDR3 256MB
Flash	1Gbit SPI NAND Flash
LAN Interface	4 x 10/100/1000Mbps auto adaptive Ethernet interfaces. Full/Half, RJ45 connector
Wireless	Compliant with IEEE802.11b/g/n, ac
	2.4G Operating frequency: 2.400-2.4835GHz
	5.8G Operating frequency: 5.150-5.825GHz
	2.4G 2*2 MIMO, rate up to 300Mbps
	5.8G 2*2 MIMO, rate up to 867Mbps
	4 external antennas 5dBi
	Support Multiple SSID
CATV Interface	RF, WDM, optical power: $+2\sim -15\text{dBm}$
	Optical reflection loss: $\geq 45\text{dB}$
	Optical receiving wavelength: $1550\pm 10\text{nm}$
	RF frequency range: 47~1000MHz, RF output impedance: 75Ω
	RF output level: 78dBuV
	AGC range: $-13\sim +1\text{dBm}$
	MER: $\geq 32\text{dB}@-15\text{dBm}$
USB	Standard USB2.0
LED	11 LED, For Status of PWR、LOS、PON、LAN1~LAN4、2.4G、5.8G Worn、Normal(CATV)
Push-Button	2 For Function of Factory Reset and WPS
Operating Condition	Temperature: $0^{\circ}\text{C}\sim +50^{\circ}\text{C}$
	Humidity: 10%~90% (non-condensing)
Storing Condition	Temperature: $-30^{\circ}\text{C}\sim +60^{\circ}\text{C}$
	Humidity: 10%~90% (non-condensing)
Power Supply	DC 12V/1A
Power Consumption	$\leq 6\text{W}$
Dimension	289mm×164mm×40mm (L×W×H)
Net Weight	0.35Kg

HUR4103XR

4. Panel lights Introduction

Pilot Lamp	Status	Description
PWR	On	The device is powered up.
	Off	The device is powered down.
LOS	Blink	The device does not receive optical signals or with low signals.
	Off	The device has received optical signal.
PON	On	The device has registered to the PON system.
	Blink	The device is registering the PON system.
	Off	The device registration is incorrect.
LAN1~LAN4	On	Port (LANx) is connected properly (LINK).
	Blink	Port (LANx) is sending or/and receiving data (ACT).
	Off	Port (LANx) connection exception or not connected.
2.4G	On	2.4G WIFI interface up
	Blink	2.4G WIFI is sending or/and receiving data (ACT).
	Off	2.4G WIFI interface down
5.8G	On	5G WIFI interface up
	Blink	5G WIFI is sending or/and receiving data (ACT).
	Off	5G WIFI interface down
Worn (CATV)	On	Input optical power is higher than 3dbm or lower than -15dbm
	Off	Input optical power is between -15dbm and 3dbm
Normal (CATV)	On	Input optical power is between -15dbm and 3dbm
	Off	Input optical power is higher than 3dbm or lower than -15dbm

HUR4103XR

5. Appearance



HUR4103XR

6. Application

- Typical Solution: FTTH(Fiber To The Home)
- Typical Business: INTERNET、IPTV、WIFI、CATV etc

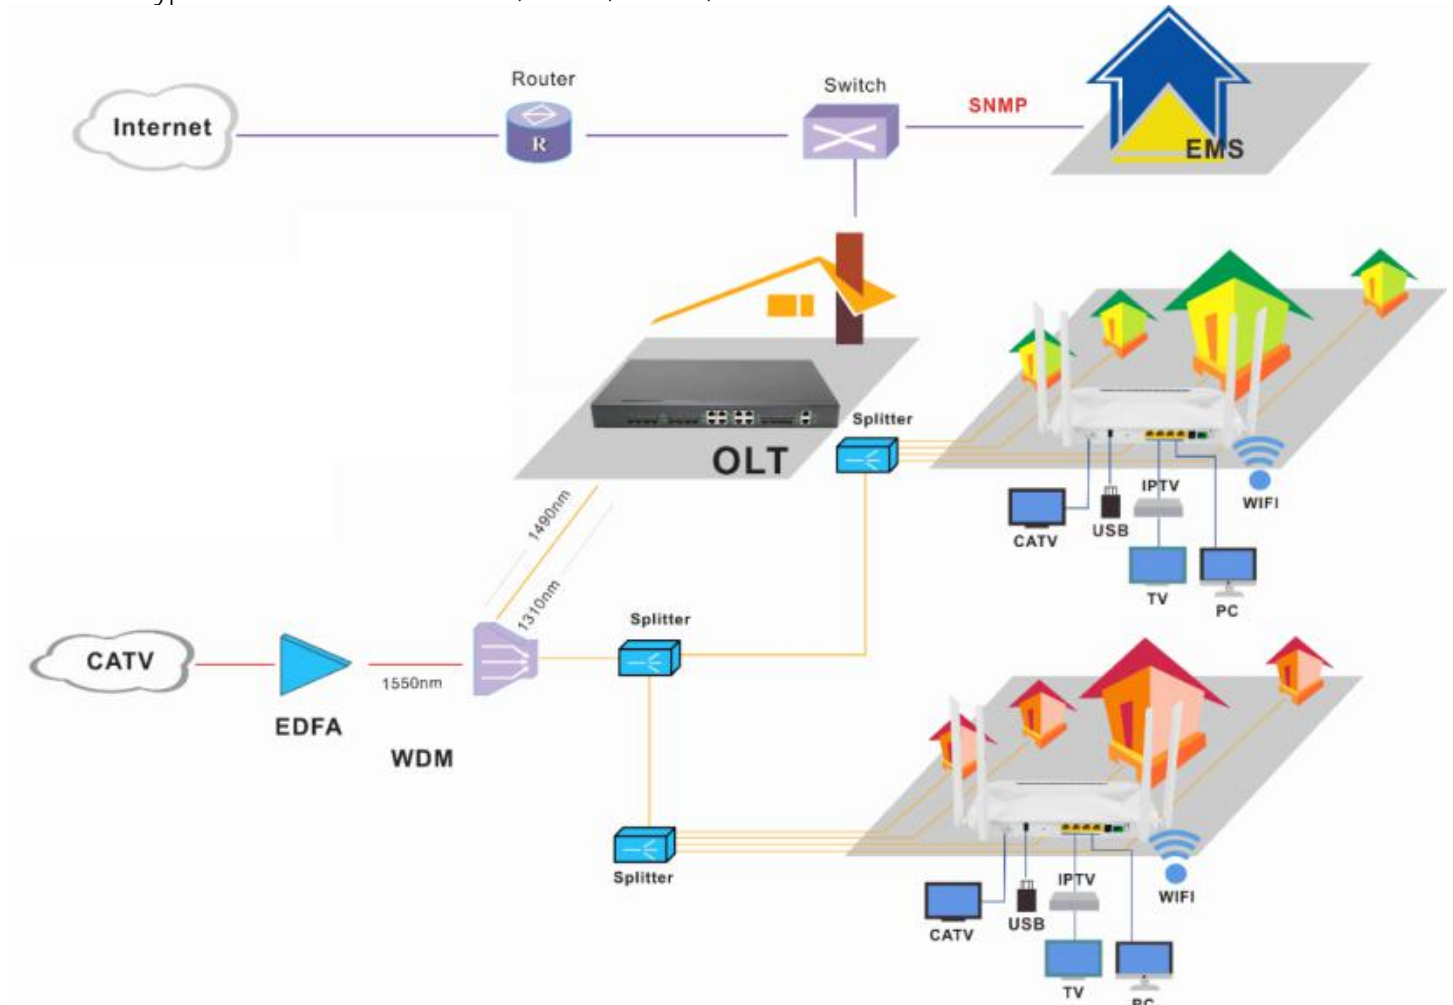


Figure: HUR4103XR Application Diagram